

300-410^{Q&As}

Implementing Cisco Enterprise Advanced Routing and Services
(ENARSI)

Pass Cisco 300-410 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.certbus.com/300-410.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers




QUESTION 1

Which technology uses the many-to-one method of mapping IP addresses?

- A. static NAT
- B. dynamic NAT
- C. NAT-PT
- D. PAT

Correct Answer: D

QUESTION 2

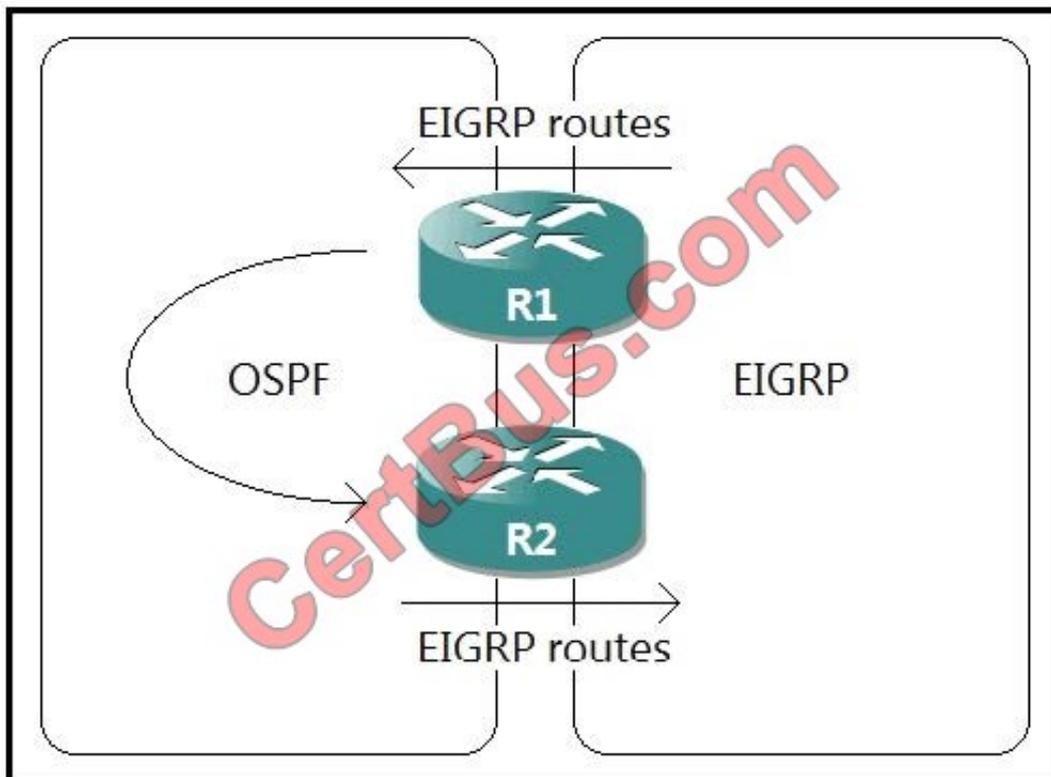

Refer to the exhibit. A network administrator configured mutual redistribution on R1 and R2 routers, which caused instability in the network. Which action resolves the issue?

- A. Set a tag in the route map when redistributing EIGRP into OSPF on R1. and match the same tag on R2 to deny when redistributing OSPF into EIGRP.
- B. Set a tag in the route map when redistributing EIGRP into OSPF on R1. and match the same tag on R2 to allow when redistributing OSPF into EIGRP.
- C. Advertise summary routes of EIGRP to OSPF and deny specific EIGRP routes when redistributing into OSPF.

D. Apply a prefix list of EIGRP network routes in OSPF domain on R1 to propagate back into the EIGRP routing domain.

Correct Answer: A

QUESTION 3

Which two protocols can cause TCP starvation? (Choose two)

- A. TFTP
- B. SNMP
- C. SMTP
- D. HTTPS
- E. FTP

Correct Answer: AB

QUESTION 4

An engineer configured access list NON-CISCO in a policy to influence routes.

```
route-map PBR, deny, sequence 5
  Match clauses:
    ip address (access-list): NON-CISCO
  Set clauses:
  Policy routing matches: 0 packets, 0 bytes
route-map PBR, permit, sequence 10
  Match clauses:
  Set clauses:
    ip next-hop 192.168.1.5
  Policy routing matches: 389362063 packets, 222009685077 bytes
```

What are the two effects of this route map configuration? (Choose two.)

- A. Packets are forwarded using normal route lookup.
- B. Packets are forwarded to the default gateway.
- C. Packets are dropped by the access list.
- D. Packets are evaluated by sequence 10.
- E. Packets are not evaluated by sequence 10.

Correct Answer: BD

QUESTION 5

Which two statements about VRF-Lite configurations are true? (Choose two.)

- A. They support the exchange of MPLS labels
- B. Different customers can have overlapping IP addresses on different VPNs
- C. They support a maximum of 512.000 routes
- D. Each customer has its own dedicated TCAM resources
- E. Each customer has its own private routing table.
- F. They support IS-IS

Correct Answer: BE

QUESTION 6

Refer to the exhibit. An engineer is trying to configure local authentication on the console line, but the device is trying to authenticate using TACACS+. Which action produces the desired configuration?

```
R1#show running-config | include aaa
aaa new-model
aaa authentication login default group tacacs+ local
aaa authentication login Console local
R1#show running-config | section line
line con 0
  logging synchronous
R1#
```

- A. Add the aaa authentication login default none command to the global configuration.
- B. Replace the capital "C" with a lowercase "c" in the aaa authentication login Console local command.

- C. Add the aaa authentication login default group tacacs+ local-case command to the global configuration.
- D. Add the login authentication Console command to the line configuration

Correct Answer: D

Reference: <https://community.cisco.com/t5/switching/how-to-define-login-local-for-console-0/td-p/2949493>

QUESTION 7

Refer to the following output:

```
Router#show ip nhrp detail
```

```
1.1.2/8 via 10.2.1.2, Tunnel1 created 00:00:12, expire 01:59:47 TypE. dynamic, Flags: authoritative unique nat registered used NBMA address:
```

```
10.12.1.2
```

What does the authoritative flag mean in regards to the NHRP information?

- A. It was obtained directly from the next-hop server.
- B. Data packets are process switches for this mapping entry.
- C. NHRP mapping is for networks that are local to this router.
- D. The mapping entry was created in response to an NHRP registration request.
- E. The NHRP mapping entry cannot be overwritten

Correct Answer: A

QUESTION 8

Which statement about route distinguishers in an MPLS network is true?

- A. Route distinguishers allow multiple instances of a routing table to coexist within the edge router.
- B. Route distinguishers are used for label bindings.
- C. Route distinguishers make a unique VPNv4 address across the MPLS network.
- D. Route distinguishers define which prefixes are imported and exported on the edge router.

Correct Answer: C

QUESTION 9

Which security feature can protect DMVPN tunnels?

- A. IPsec
- B. TACACS+
- C. RTBH
- D. RADIUS

Correct Answer: A

QUESTION 10

Which two components are needed for a service provider to utilize the LVPN MPLS application? (Choose two.)

- A. The P routers must be configured for MP-iBGP toward the PE routers
- B. The P routers must be configured with RSVP.
- C. The PE routers must be configured for MP-iBGP with other PE routers
- D. The PE routers must be configured for MP-eBGP to connect to CEs
- E. The P and PE routers must be configured with LDP or RSVP

Correct Answer: AD

QUESTION 11

Refer to the exhibit.

```
ip dhcp pool 1
network 200.30.30.0/24
default-router 200.30.30.100
lease 40
!
ip dhcp pool 2
network 200.30.40.0/24
default-router 200.30.40.100
lease 40
!
```

The server for the finance department is not reachable consistently on the 200.30.40.0/24 network and after every second month it gets a new IP address. Which two actions must be taken to resolve this Issue? (Choose two.)

- A. Configure the server to use DHCP on the network with default gateway 200 30.40.100.

- B. Configure the server with a static IP address and default gateway.
- C. Configure the router to exclude a server IP address.
- D. Configure the server to use DHCP on the network with default gateway 200 30.30.100.

Correct Answer: BC

QUESTION 12

A network engineer needs to verify IP SLA operations on an interface that shows an indication of excessive traffic. Which command should the engineer use to complete this action?

- A. show frequency
- B. show track
- C. show reachability
- D. show threshold

Correct Answer: B

[300-410 Practice Test](#)

[300-410 Study Guide](#)

[300-410 Braindumps](#)

To Read the [Whole Q&As](#), please purchase the [Complete Version](#) from [Our website](#).

Try our product !

100% Guaranteed Success

100% Money Back Guarantee

365 Days Free Update

Instant Download After Purchase

24x7 Customer Support

Average 99.9% Success Rate

More than 800,000 Satisfied Customers Worldwide

Multi-Platform capabilities - [Windows](#), [Mac](#), [Android](#), [iPhone](#), [iPod](#), [iPad](#), [Kindle](#)

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

<https://www.certbus.com/allproducts>

Need Help

Please provide as much detail as possible so we can best assist you.

To update a previously submitted ticket:



 <p>One Year Free Update Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.</p>	 <p>Money Back Guarantee To ensure that you are spending on quality products, we provide 100% money back guarantee for 30 days from the date of purchase.</p>	 <p>Security & Privacy We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.</p>
---	---	--

Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © certbus, All Rights Reserved.