www.CertBus.com

CERTBUS

400-151 Q&As

CCIE Data Center Written

Pass Cisco 400-151 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.certbus.com/400-151.html
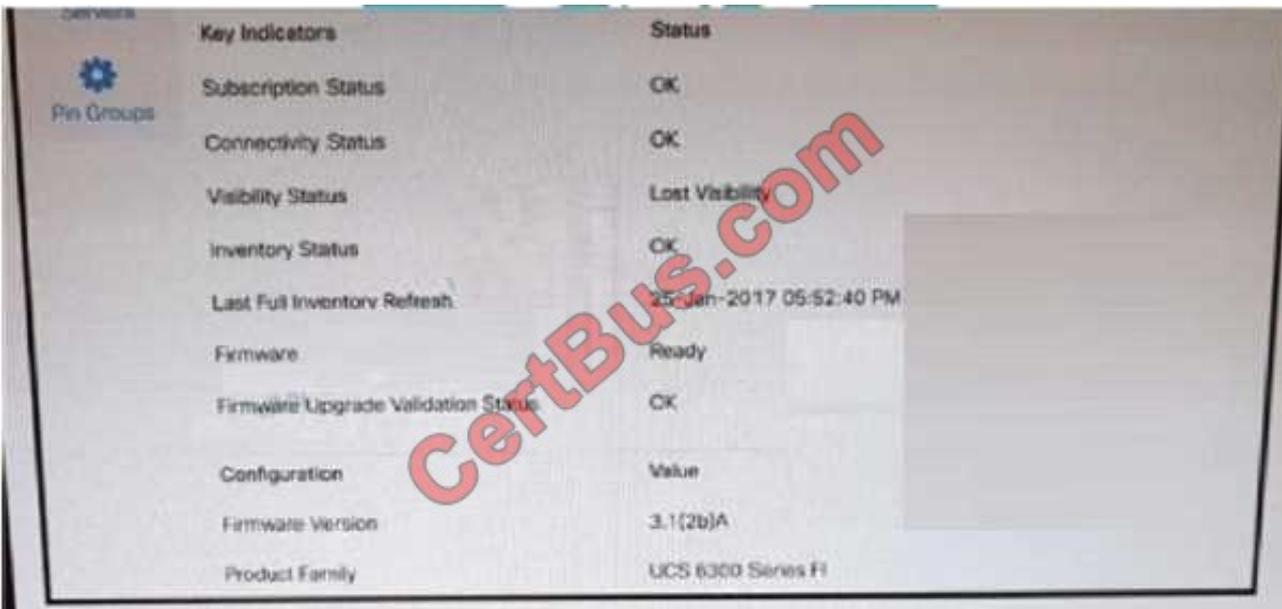
100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

⚙ **Instant Download** After Purchase

⚙ **100% Money Back** Guarantee

⚙ **365 Days** Free Update

⚙ **800,000+** Satisfied Customers

QUESTION 1

Refer to the exhibit.

Which potential cause of this issue is true?

A. Cisco UCS Central has run out of licenses and the grace-period time has expired

B. A firewall is blocking communication between the Cisco UCS Fabric Interconnect and Cisco UCS Central

C. There is no issue .The admin of Cisco UCS Central has removed the Cisco UCS Domain from the inventory and after the clean-up takes place, this domain will no longer be present

D. There is no issue Performing a manual full inventory refresh allows Cisco UCS Central and Cisco UCS Manager to become in-sync again

Correct Answer: B

https://www.cisco.com/c/en/us/support/docs/servers-unified-computing/unified-computing-syst em/200901-Troubleshooting-UCSM-Registration-Issues.pdf

QUESTION 2

A user wants to allow VLANs 1-3967 on a pure Layer 2 FabricPath spine with the least amount of configuration required. Which configuration is correct?

A. Vlan 3967 mode fabricpath Interface eth(fabricpath core interface) switchport mode fabricpath

B. Vlan 1-3967 Interface eth(fabricpath core interface) switchport mode trunk switchport trunk allowed vlan all

C. Vlan 1-3967 mode fabricpath Interface eth(fabricpath core interface) switchport mode fabricpath

D. Vlan 1 mode fabricpath fabricpath mode transit

Correct Answer: C

QUESTION 3

Which three commands must be run to enable support of adapter-fex on an interface on a Cisco Nexus Switch? (Choose three.)

A. switchport mode adapter-fex

B. feature fex

C. feature-set adapter-fex

D. switchport mode vntag

E. feature-set virtualization

F. feature adapter-fex

Correct Answer: DEF

QUESTION 4

Which three options are valid sources for Cisco UCS monitor sessions? (Choose three.)

A. VSAN

B. pin group

C. vHBA

D. vNIC

E. VLAN

F. uplink FC interface

Correct Answer: CDE

Traffic Sources

An Ethernet traffic monitoring session can monitor any of the following traffic sources:

Uplink Ethernet port

Ethernet port channel

VLAN

Service profile vNIC

Service profile vHBA

FCoE port

Port channels

Server port

A Fibre Channel traffic monitoring session can monitor any of the following traffic sources:

Uplink Fibre Channel port

SAN port channel

VSAN

Service profile vHBA

Fibre Channel storage port

Reference: http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/gui/config/guide/2-0/b_UCSM_GUI_Configuration_Guide_2_0/b_UCSM_GUI_Configuration_Guide_2_0_chapter_0101001.html

QUESTION 5

Which three statements correctly describe the encoding formats for NETCONF, RESTCONF, and gRPC? (Choose three.)

A. NETCONF uses JSON encoding

B. RESTCONF uses GPB encoding

C. gRPC uses XML encoding

D. RESTCONF uses JSON encoding

E. gRPC uses GPB encoding

F. NETCONF uses XML encoding

Correct Answer: CDF

QUESTION 6

Which two statements about Cisco UCS Director API access key are true? (Choose two.)

A. API access key is a unique security access key code that is associated with a specific Cisco UCS Director user account.

B. API access key isrequired for Cisco UCS Director to authenticate API requests.

C. API access key is a shared secret that you must configure in Cisco UCS Director to enable REST API.

D. API access key is unique for each API request.

Correct Answer: AB

QUESTION 7

A user is presented with the underlying hardware and software needed to develop and offer applications via the Internet from a cloud service provider. Which cloud model is this user consuming?

A. Infrastructure as a Service

B. Platform as a Service

C. Software as a Service

D. Application as a Service

Correct Answer: B

QUESTION 8

Drag and Drop the key components of LISP from left onto the correct definitions on the right

Select and Place:

ingress tunnel router	It receives packets from core-facing interfaces (the Internet) and either decapsulates LISP packets or delivers them to local EIDs at the site.
egress tunnel router	It is assigned to devices that make up the global routing system.
map server	It receives map-requests encapsulated to it from ITRs.
map resolver	It receives packets from site-facing interfaces (internal hosts)and either LISP encapsulates packets to remote LISP sites or the ITR natively forwards packets to non-LISP sites.
routing locators	It is assigned to end hosts.
endpoint identifiers	It receives map-register control packets from ETRs.

Correct Answer:

		egress tunnel router
		routing locators
		map resolver
		ingress tunnel router
		endpoint identifiers
		map server

QUESTION 9

Which description of how to enable DIMM Blacklisting is true?

A. Configure a memory policy in the equipment > policy subtab.

B. Enable blacklisting in the servers > policy subtab.

C. Configure a memory policy under the services tab.

D. Enable blacklisting in the servers inventory > memory subtab.

Correct Answer: B

QUESTION 10

Which two statements about multicast routing are true? (Choose two.)

A. Multicast routes are used to directly forward traffic without making RPF checks.

B. IPv6 static multicast routes are supported.

C. You can define RPF routes for multicast when you want multicast data to diverge from the unicast traffic path.

D. You can define RPF routes for multicast on border routers to enable reverse path forwarding to an external network.

E. RPF routes for multicast can be redistributed.

Correct Answer: CD

QUESTION 11

Drag and drop the spanning-tree port from the left onto the correct description on the right

Select and Place:

Root port	It acts as a backup for the path provided by a designated port toward the leaves of the spanning tree.
Designated port	It has no role within the operation of the spanning tee
Alternate port	It provides the best path (lowest cost) when the cevice torwards packets to the root bridge.
Backup port	It offers a backup path toward the root bridge to the path provided by the current root port.
Disabled port	It connects to the device that has the lowest path cost when forwarding packets from that LAN to the root bridge.

Correct Answer:

	Backup port
	Disabled port
	Root port
	Alternate port
	Designated port

QUESTION 12

Which OSPF feature groups LSAs with similar link-state refresh times to allow OSPFv2 to pack multiple LSAs into an OSPFv2 update message?

A. LSA throttling

B. LSA compression

C. LSA group pacing

D. SPF optimization

Correct Answer: C

400-151 PDF Dumps   **400-151 VCE Dumps**   **400-151 Exam Questions**

To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications.
You can view Vendor list of All Certification Exams offered:

https://www.certbus.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket:

One Year Free Update
Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.

Money Back Guarantee
To ensure that you are spending on quality products, we provide 100% money back guarantee for 30 days from the date of purchase.

Security & Privacy
We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.